



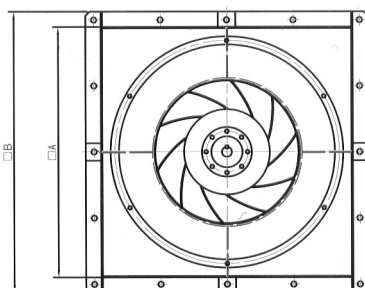
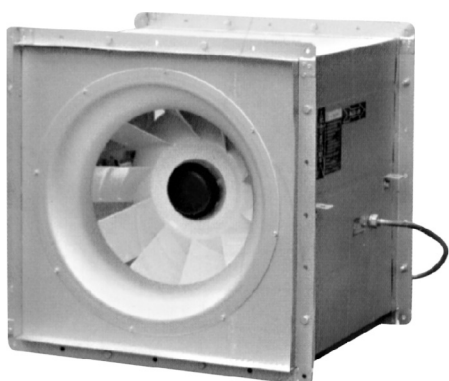


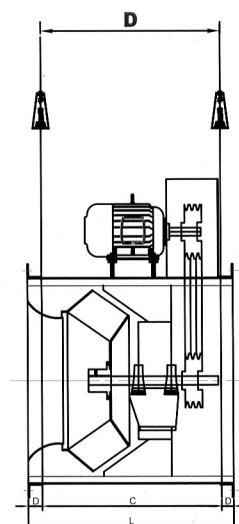

OS-SB형

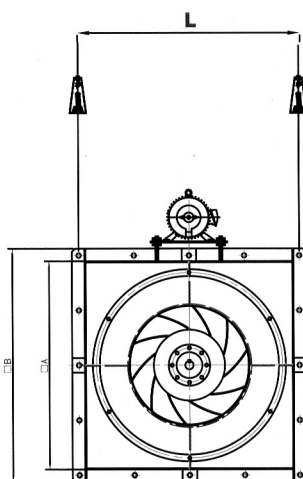



OS-SBV형

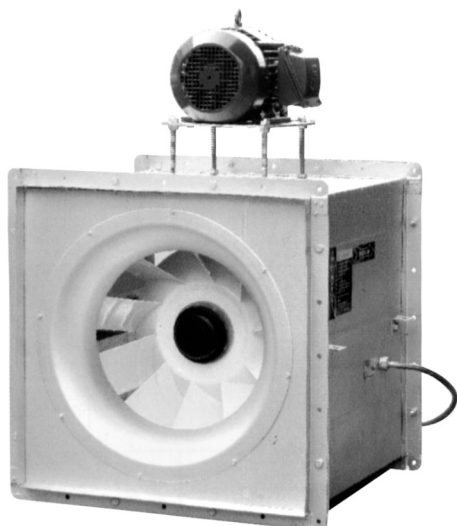


규격표(Dimension)

CODE NO	□A	□B	C	D	L
OS-SB / OS-SBV - 275	400	480	320	40	400
OS-SB / OS-SBV - 375	500	580	420	40	500
OS-SB / OS-SBV - 475	600	680	520	40	600
OS-SB / OS-SBV - 575	700	780	620	100	700
OS-SB / OS-SBV - 675	800	880	720	100	800
OS-SB / OS-SBV - 775	900	980	820	100	900
OS-SB / OS-SBV - 875	1000	1100	920	100	1000



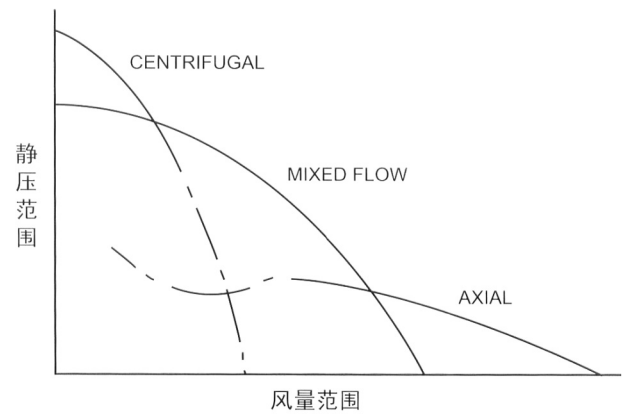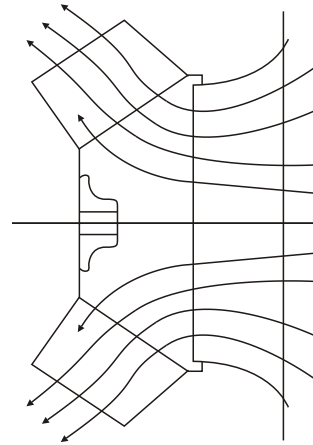

성능 곡선

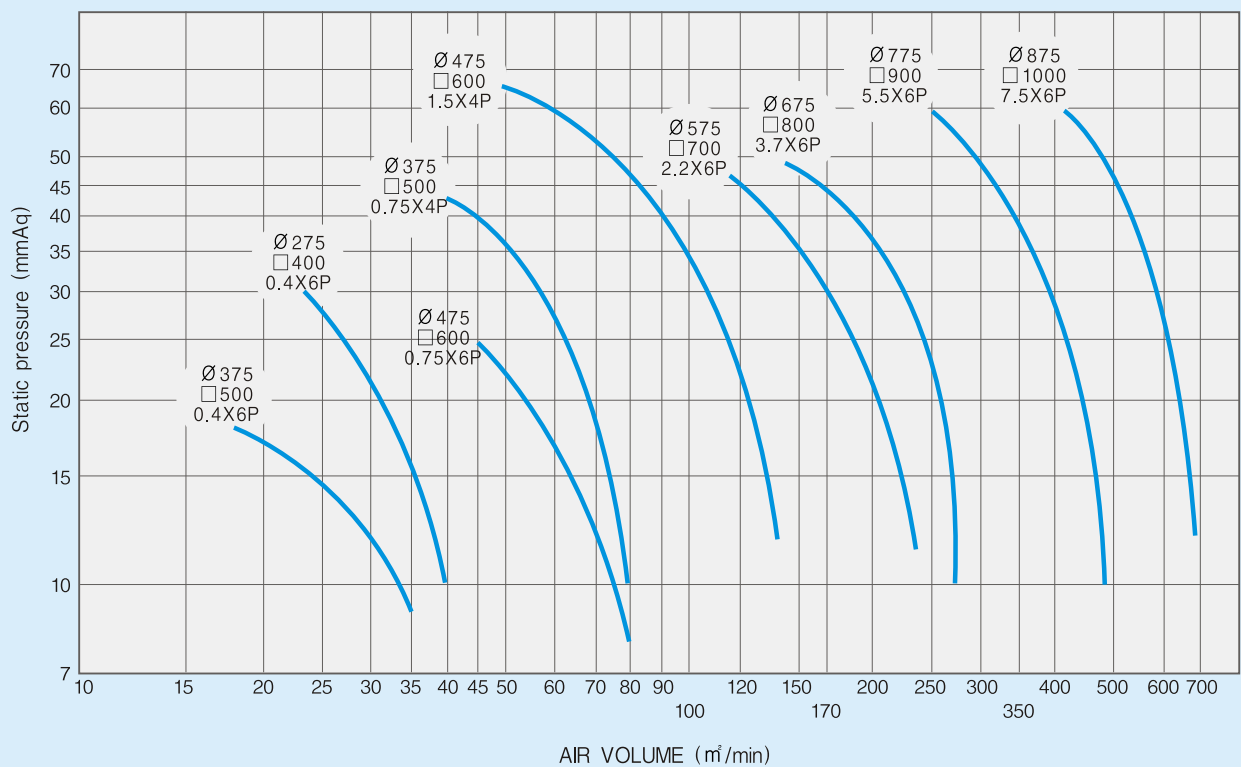



MODEL : OF315-37°

RPM : 1763

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	10.09	0.05	0.00
2	950	7.34	9.29	0.05	22.64
3	950	11.95	8.23	0.05	31.66
4	950	17.67	6.68	0.05	39.20
5	950	22.38	5.44	0.05	39.21
1	1160	0.00	15.05	0.10	0.00
2	1160	8.96	13.84	0.09	22.64
3	1160	14.59	12.27	0.09	31.66
4	1160	21.57	9.96	0.09	39.20
5	1160	27.33	8.11	0.09	39.21
1	1450	0.00	23.51	0.19	0.00
2	1450	11.20	21.63	0.17	22.64
3	1450	18.23	19.17	0.18	31.66
4	1450	26.97	15.56	0.17	39.20
5	1450	34.16	12.67	0.18	39.21
1	1730	0.00	33.47	0.32	0.00
2	1730	13.37	30.79	0.30	22.64
3	1730	21.76	27.28	0.31	31.66
4	1730	32.18	22.15	0.30	39.20
5	1730	40.75	18.04	0.31	39.21

MODEL : OF315-27°

RPM : 1776

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	8.06	0.05	0.00
2	950	6.13	7.52	0.04	16.85
3	950	12.37	5.92	0.05	25.87
4	950	16.71	4.33	0.05	25.55
5	950	18.61	3.25	0.05	21.37
1	1160	0.00	12.01	0.08	0.00
2	1160	7.49	11.21	0.08	16.85
3	1160	15.11	8.82	0.08	25.87
4	1160	20.40	6.45	0.08	25.55
5	1160	22.73	4.84	0.08	21.37
1	1450	0.00	18.77	0.16	0.00
2	1450	9.36	17.52	0.16	16.85
3	1450	18.88	13.79	0.16	25.87
4	1450	25.51	10.08	0.16	25.55
5	1450	28.41	7.57	0.16	21.37
1	1730	0.00	26.71	0.28	0.00
2	1730	11.16	24.94	0.27	16.85
3	1730	22.53	19.62	0.28	25.87
4	1730	30.43	14.35	0.28	25.55
5	1730	33.90	10.77	0.28	21.37

MODEL : OF315-22°

RPM : 1782

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	7.96	0.04	0.00
2	950	4.89	6.85	0.04	13.42
3	950	11.52	5.54	0.04	23.83
4	950	13.43	4.17	0.04	22.47
5	950	15.71	2.54	0.04	17.26
1	1160	0.00	11.86	0.07	0.00
2	1160	5.97	10.21	0.07	13.42
3	1160	14.06	8.26	0.08	23.83
4	1160	16.40	6.22	0.07	22.47
5	1160	19.18	3.78	0.07	17.26
1	1450	0.00	18.54	0.13	0.00
2	1450	7.46	15.95	0.14	13.42
3	1450	17.58	12.91	0.16	23.83
4	1450	20.50	9.72	0.14	22.47
5	1450	23.97	5.91	0.13	17.26
1	1730	0.00	26.93	0.23	0.00
2	1730	8.90	22.70	0.25	13.42
3	1730	20.97	18.38	0.26	23.83
4	1730	24.45	13.84	0.25	22.47
5	1730	28.60	8.42	0.23	17.26

※ 상기데이터는 KS B 6311의 의거 시험한 데이터입니다





MIXED FLOW FAN



MODEL : OF350-37°

RPM : 1778

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	13.79	0.09	0.00
2	950	10.15	11.97	0.09	23.32
3	950	18.98	11.14	0.09	40.62
4	950	28.70	10.26	0.09	56.54
5	950	37.63	7.31	0.09	52.81
1	1160	0.00	20.56	0.16	0.00
2	1160	12.39	17.84	0.15	23.32
3	1160	23.18	16.61	0.15	40.62
4	1160	35.04	15.29	0.15	56.54
5	1160	45.94	10.89	0.15	52.81
1	1450	0.00	32.12	0.32	0.00
2	1450	15.49	27.88	0.30	23.32
3	1450	28.98	25.95	0.30	40.62
4	1450	43.80	23.90	0.30	56.54
5	1450	57.43	17.02	0.30	52.81
1	1730	0.00	45.72	0.54	0.00
2	1730	18.48	39.69	0.51	23.32
3	1730	34.57	36.94	0.51	40.62
4	1730	52.26	34.02	0.51	56.54
5	1730	68.52	24.23	0.51	52.81

MODEL : OF350-27°

RPM : 1778

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	12.96	0.06	0.00
2	950	8.02	12.48	0.06	26.82
3	950	16.52	11.60	0.06	55.20
4	950	24.86	7.83	0.06	56.08
5	950	30.44	5.96	0.06	48.59
1	1160	0.00	19.32	0.11	0.00
2	1160	9.79	18.60	0.11	26.82
3	1160	20.17	17.29	0.10	55.20
4	1160	30.35	11.68	0.10	56.08
5	1160	37.17	8.88	0.11	48.59
1	1450	0.00	30.19	0.22	0.00
2	1450	12.24	29.07	0.22	26.82
3	1450	25.22	27.02	0.20	55.20
4	1450	37.94	18.24	0.20	56.08
5	1450	46.46	13.88	0.22	48.59
1	1730	0.00	42.98	0.37	0.00
2	1730	14.60	41.38	0.37	26.82
3	1730	30.09	38.46	0.34	55.20
4	1730	45.26	25.97	0.34	56.08
5	1730	55.43	19.75	0.37	48.59

MODEL : OF350-22°

RPM : 1778

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	11.83	0.05	0.00
2	950	6.72	10.54	0.06	19.96
3	950	12.27	9.57	0.05	36.51
4	950	18.75	9.25	0.05	53.90
5	950	24.55	4.14	0.05	31.59
1	1160	0.00	17.64	0.10	0.00
2	1160	8.21	15.71	0.11	19.96
3	1160	14.99	14.27	0.10	36.51
4	1160	22.89	13.79	0.10	53.90
5	1160	29.97	6.17	0.10	31.59
1	1450	0.00	27.57	0.19	0.00
2	1450	10.26	24.55	0.21	19.96
3	1450	18.73	22.30	0.19	36.51
4	1450	28.62	21.55	0.19	53.90
5	1450	37.47	9.65	0.19	31.59
1	1730	0.00	39.24	0.32	0.00
2	1730	12.24	34.94	0.35	19.96
3	1730	22.35	31.75	0.32	36.51
4	1730	34.14	30.68	0.32	53.90
5	1730	44.70	13.73	0.32	31.59

MODEL : OF350-17°

RPM : 1778

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	10.22	0.05	0.00
2	950	5.01	10.25	0.05	15.56
3	950	10.02	9.79	0.05	30.48
4	950	15.03	7.50	0.05	35.04
5	950	20.66	3.15	0.05	20.20
1	1160	0.00	15.24	0.10	0.00
2	1160	6.12	15.28	0.10	15.56
3	1160	12.23	14.59	0.10	30.48
4	1160	18.35	11.19	0.10	35.04
5	1160	25.22	4.69	0.10	20.20
1	1450	0.00	23.81	0.19	0.00
2	1450	7.65	23.87	0.19	15.56
3	1450	15.29	22.80	0.19	30.48
4	1450	22.94	17.48	0.19	35.04
5	1450	31.53	7.33	0.19	20.20
1	1730	0.00	33.89	0.32	0.00
2	1730	9.13	33.98	0.33	15.56
3	1730	18.24	32.46	0.32	30.48
4	1730	27.37	24.88	0.32	35.04
5	1730	37.62	10.43	0.32	20.20

※ 상기데이터는 KS B 6311의 의거 시험한 데이터입니다





MODEL : OF400-37°

RPM : 1772

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	18.60	0.18	0.00
2	950	15.84	17.32	0.17	26.52
3	950	28.55	14.24	0.17	38.03
4	950	43.37	11.66	0.18	46.91
5	950	58.19	6.50	0.17	35.35
1	1160	0.00	27.73	0.32	0.00
2	1160	19.34	25.83	0.31	26.52
3	1160	34.87	21.23	0.32	38.03
4	1160	52.96	17.38	0.32	46.91
5	1160	71.05	9.69	0.32	35.35
1	1450	0.00	43.33	0.63	0.00
2	1450	24.17	40.36	0.60	26.52
3	1450	43.58	33.18	0.62	38.03
4	1450	66.20	27.16	0.63	46.91
5	1450	88.82	15.13	0.62	35.35
1	1730	0.00	61.68	1.07	0.00
2	1730	28.84	57.45	1.02	26.52
3	1730	52.00	47.23	1.06	38.03
4	1730	78.98	38.67	1.06	46.91
5	1730	105.97	21.54	1.06	35.35

MODEL : OF400-27°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	19.39	0.17	0.00
2	950	13.70	16.43	0.15	24.30
3	950	28.52	14.21	0.15	44.19
4	950	41.10	12.38	0.15	54.96
5	950	55.93	5.26	0.15	31.79
1	1160	0.00	28.91	0.31	0.00
2	1160	16.73	24.49	0.28	24.30
3	1160	34.83	21.19	0.27	44.19
4	1160	50.19	18.46	0.28	54.96
5	1160	68.30	7.85	0.28	31.79
1	1450	0.00	45.17	0.60	0.00
2	1450	20.91	38.27	0.54	24.30
3	1450	43.53	33.10	0.53	44.19
4	1450	62.73	28.84	0.54	54.96
5	1450	85.37	12.26	0.54	31.79
1	1730	0.00	64.30	1.02	0.00
2	1730	24.95	54.47	0.91	24.30
3	1730	51.94	47.12	0.91	44.19
4	1730	74.85	41.06	0.91	54.96
5	1730	101.86	17.45	0.91	31.79

MODEL : OF400-22°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	18.28	0.15	0.00
2	950	12.00	17.51	0.14	24.79
3	950	23.73	15.21	0.14	42.15
4	950	35.38	10.80	0.14	44.64
5	950	46.80	4.57	0.14	24.73
1	1160	0.00	27.26	0.28	0.00
2	1160	14.65	26.11	0.25	24.79
3	1160	28.97	22.67	0.25	42.15
4	1160	43.20	16.11	0.25	44.64
5	1160	57.14	6.81	0.26	24.73
1	1450	0.00	42.59	0.54	0.00
2	1450	18.31	40.80	0.49	24.79
3	1450	36.22	35.43	0.50	42.15
4	1450	53.99	25.17	0.50	44.64
5	1450	71.43	10.65	0.50	24.73
1	1730	0.00	60.62	0.92	0.00
2	1730	21.84	58.08	0.84	24.79
3	1730	43.21	50.43	0.84	42.15
4	1730	64.42	35.82	0.84	44.64
5	1730	85.22	15.16	0.85	24.73

MODEL : OF400-17°

RPM : 1770

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	17.25	0.15	0.00
2	950	11.21	14.52	0.14	18.70
3	950	20.21	12.70	0.14	30.73
4	950	30.71	11.83	0.14	43.46
5	950	40.43	4.06	0.13	20.75
1	1160	0.00	25.72	0.27	0.00
2	1160	13.69	21.66	0.26	18.70
3	1160	24.68	18.94	0.25	30.73
4	1160	37.49	17.63	0.25	43.46
5	1160	49.36	6.06	0.24	20.75
1	1450	0.00	40.19	0.53	0.00
2	1450	17.11	33.84	0.51	18.70
3	1450	30.85	29.59	0.49	30.73
4	1450	46.87	27.55	0.49	43.46
5	1450	61.70	9.46	0.46	20.75
1	1730	0.00	57.21	0.89	0.00
2	1730	20.42	48.17	0.86	18.70
3	1730	36.81	42.12	0.82	30.73
4	1730	55.92	39.22	0.82	43.46
5	1730	73.62	13.47	0.78	20.75

※ 상기데이터는 KS B 6311의 의거 시험한 데이터입니다





MIXED FLOW FAN



MODEL : OF450-37°

RPM : 1740

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	23.84	0.29	0.00
2	950	21.18	22.05	0.28	27.33
3	950	40.83	20.04	0.30	45.24
4	950	62.02	16.46	0.29	57.03
5	950	83.60	11.61	0.29	54.21
1	1160	0.00	35.55	0.52	0.00
2	1160	25.87	32.88	0.51	27.33
3	1160	49.85	29.88	0.54	45.24
4	1160	75.73	24.55	0.53	57.03
5	1160	102.08	17.31	0.53	54.21
1	1450	0.00	55.55	1.01	0.00
2	1450	32.33	51.38	0.99	27.33
3	1450	62.32	46.69	1.05	45.24
4	1450	94.67	38.35	1.04	57.03
5	1450	127.60	27.05	1.04	54.21
1	1730	0.00	79.07	1.72	0.00
2	1730	38.58	73.14	1.69	27.33
3	1730	74.35	66.46	1.78	45.24
4	1730	112.95	54.60	1.77	57.03
5	1730	152.24	38.50	1.77	54.21

MODEL : OF450-27°

RPM : 1736

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	28.24	0.32	0.00
2	950	18.61	24.22	0.29	25.40
3	950	39.03	20.76	0.30	44.03
4	950	58.85	18.29	0.29	60.27
5	950	74.43	8.66	0.28	37.02
1	1160	0.00	42.10	0.59	0.00
2	1160	22.73	36.12	0.53	25.40
3	1160	47.66	30.95	0.55	44.03
4	1160	71.86	27.27	0.53	60.27
5	1160	90.89	12.92	0.52	37.02
1	1450	0.00	65.78	1.15	0.00
2	1450	28.41	56.43	1.03	25.40
3	1450	59.58	48.36	1.07	44.03
4	1450	89.82	42.61	1.04	60.27
5	1450	113.61	20.18	1.01	37.02
1	1730	0.00	93.64	1.96	0.00
2	1730	33.89	80.33	1.75	25.40
3	1730	71.08	68.84	1.82	44.03
4	1730	107.17	60.65	1.76	60.27
5	1730	135.55	28.73	1.72	37.02

MODEL : OF450-22°

RPM : 1736

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	26.98	0.29	0.00
2	950	16.65	19.75	0.25	21.21
3	950	34.31	18.00	0.24	41.25
4	950	50.62	17.08	0.25	57.35
5	950	65.00	6.47	0.24	28.90
1	1160	0.00	40.23	0.54	0.00
2	1160	20.33	29.44	0.46	21.21
3	1160	41.90	26.84	0.45	41.25
4	1160	61.82	25.46	0.45	57.35
5	1160	79.37	9.65	0.43	28.90
1	1450	0.00	62.86	1.05	0.00
2	1450	25.41	46.00	0.90	21.21
3	1450	52.37	41.93	0.87	41.25
4	1450	77.27	39.79	0.88	57.35
5	1450	99.21	15.07	0.85	28.90
1	1730	0.00	89.48	1.78	0.00
2	1730	30.31	65.48	1.53	21.21
3	1730	62.48	59.69	1.48	41.25
4	1730	92.19	56.64	1.49	57.35
5	1730	118.37	21.46	1.44	28.90

MODEL : OF450-27°

RPM : 1736

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	23.75	0.23	0.00
2	950	14.01	22.09	0.21	23.67
3	950	25.58	18.53	0.20	37.88
4	950	38.79	11.67	0.21	35.91
5	950	50.51	5.18	0.20	21.57
1	1160	0.00	35.40	0.43	0.00
2	1160	17.10	32.94	0.39	23.67
3	1160	31.23	27.63	0.37	37.88
4	1160	47.36	17.40	0.38	35.91
5	1160	61.67	7.73	0.36	21.57
1	1450	0.00	55.32	0.84	0.00
2	1450	21.38	51.47	0.76	23.67
3	1450	39.04	43.18	0.73	37.88
4	1450	59.20	27.19	0.73	35.91
5	1450	77.09	12.08	0.71	21.57
1	1730	0.00	78.75	1.42	0.00
2	1730	25.51	73.27	1.29	23.67
3	1730	46.58	61.46	1.23	37.88
4	1730	70.64	38.70	1.24	35.91
5	1730	91.97	17.19	1.20	21.57

※ 상기데이터는 KS B 6311의 외거 시험한 데이터입니다





MODEL : OF500-37°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	28.36	0.58	0.00
2	950	28.82	26.65	0.56	22.32
3	950	57.14	24.01	0.58	38.54
4	950	85.27	18.56	0.58	44.84
5	950	114.28	10.34	0.57	33.75
1	1160	0.00	42.28	1.05	0.00
2	1160	35.20	39.73	1.02	22.32
3	1160	69.77	35.80	1.06	38.54
4	1160	104.12	27.67	1.05	44.84
5	1160	139.54	15.41	1.04	33.75
1	1450	0.00	66.07	2.05	0.00
2	1450	43.99	62.07	2.00	22.32
3	1450	87.21	55.94	2.07	38.54
4	1450	130.15	43.24	2.05	44.84
5	1450	174.42	24.08	2.03	33.75
1	1730	0.00	94.05	3.48	0.00
2	1730	52.49	88.36	3.39	22.32
3	1730	104.05	79.63	3.51	38.54
4	1730	155.29	61.55	3.48	44.84
5	1730	208.10	34.28	3.45	33.75

MODEL : OF500-27°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	26.72	0.53	0.00
2	950	22.95	23.10	0.50	17.20
3	950	45.26	20.32	0.50	29.84
4	950	68.42	17.77	0.48	41.00
5	950	90.51	7.95	0.48	24.51
1	1160	0.00	39.83	0.96	0.00
2	1160	28.02	34.44	0.92	17.20
3	1160	55.26	30.29	0.92	29.84
4	1160	83.54	26.49	0.88	41.00
5	1160	110.52	11.86	0.87	24.51
1	1450	0.00	62.24	1.87	0.00
2	1450	35.03	53.81	1.79	17.20
3	1450	69.08	47.33	1.79	29.84
4	1450	104.43	41.39	1.72	41.00
5	1450	138.15	18.53	1.71	24.51
1	1730	0.00	88.59	3.18	0.00
2	1730	41.79	76.60	3.04	17.20
3	1730	82.42	67.37	3.04	29.84
4	1730	124.59	58.92	2.93	41.00
5	1730	164.82	26.37	2.90	24.51

MODEL : OF500-22°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	25.21	0.51	0.00
2	950	21.79	22.16	0.50	15.83
3	950	42.20	19.28	0.50	26.67
4	950	62.11	15.31	0.50	30.87
5	950	84.40	7.81	0.51	21.20
1	1160	0.00	37.59	0.93	0.00
2	1160	26.61	33.04	0.91	15.83
3	1160	51.53	28.75	0.91	26.67
4	1160	75.84	22.83	0.92	30.87
5	1160	103.06	11.65	0.93	21.20
1	1450	0.00	58.73	1.81	0.00
2	1450	33.26	51.62	1.77	15.83
3	1450	64.41	44.93	1.77	26.67
4	1450	94.81	35.68	1.79	30.87
5	1450	128.82	18.21	1.81	21.20
1	1730	0.00	83.60	3.07	0.00
2	1730	39.68	73.48	3.01	15.83
3	1730	76.85	63.95	3.01	26.67
4	1730	113.11	50.79	3.04	30.87
5	1730	153.70	25.92	3.07	21.20

MODEL : OF500-17°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	25.21	0.50	0.00
2	950	18.07	23.39	0.47	14.56
3	950	36.14	21.07	0.47	26.25
4	950	53.10	15.72	0.47	28.77
5	950	71.03	6.11	0.46	15.28
1	1160	0.00	37.59	0.91	0.00
2	1160	22.06	34.87	0.86	14.56
3	1160	44.13	31.42	0.86	26.25
4	1160	64.84	23.44	0.86	28.77
5	1160	86.73	9.11	0.85	15.28
1	1450	0.00	58.73	1.77	0.00
2	1450	27.58	54.48	1.69	14.56
3	1450	55.16	49.10	1.69	26.25
4	1450	81.05	36.63	1.69	28.77
5	1450	108.42	14.24	1.65	15.28
1	1730	0.00	83.60	3.01	0.00
2	1730	32.91	77.56	2.86	14.56
3	1730	65.81	69.89	2.86	26.25
4	1730	96.70	52.14	2.86	28.77
5	1730	129.35	20.27	2.80	15.28

※ 상기데이터는 KS B 6311의 의거 시험한 데이터입니다





MIXED FLOW FAN



MODEL : OF500-37°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	28.36	0.58	0.00
2	950	28.82	26.65	0.56	22.32
3	950	57.14	24.01	0.58	38.54
4	950	85.27	18.56	0.58	44.84
5	950	114.28	10.34	0.57	33.75
1	1160	0.00	42.28	1.05	0.00
2	1160	35.20	39.73	1.02	22.32
3	1160	69.77	35.80	1.06	38.54
4	1160	104.12	27.67	1.05	44.84
5	1160	139.54	15.41	1.04	33.75
1	1450	0.00	66.07	2.05	0.00
2	1450	43.99	62.07	2.00	22.32
3	1450	87.21	55.94	2.07	38.54
4	1450	130.15	43.24	2.05	44.84
5	1450	174.42	24.08	2.03	33.75
1	1730	0.00	94.05	3.48	0.00
2	1730	52.49	88.36	3.39	22.32
3	1730	104.05	79.63	3.51	38.54
4	1730	155.29	61.55	3.48	44.84
5	1730	208.10	34.28	3.45	33.75

MODEL : OF500-27°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	26.72	0.53	0.00
2	950	22.95	23.10	0.50	17.20
3	950	45.26	20.32	0.50	29.84
4	950	68.42	17.77	0.48	41.00
5	950	90.51	7.95	0.48	24.51
1	1160	0.00	39.83	0.96	0.00
2	1160	28.02	34.44	0.92	17.20
3	1160	55.26	30.29	0.92	29.84
4	1160	83.54	26.49	0.88	41.00
5	1160	110.52	11.86	0.87	24.51
1	1450	0.00	62.24	1.87	0.00
2	1450	35.03	53.81	1.79	17.20
3	1450	69.08	47.33	1.79	29.84
4	1450	104.43	41.39	1.72	41.00
5	1450	138.15	18.53	1.71	24.51
1	1730	0.00	88.59	3.18	0.00
2	1730	41.79	76.60	3.04	17.20
3	1730	82.42	67.37	3.04	29.84
4	1730	124.59	58.92	2.93	41.00
5	1730	164.82	26.37	2.90	24.51

MODEL : OF500-22°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	25.21	0.51	0.00
2	950	21.79	22.16	0.50	15.83
3	950	42.20	19.28	0.50	26.67
4	950	62.11	15.31	0.50	30.87
5	950	84.40	7.81	0.51	21.20
1	1160	0.00	37.59	0.93	0.00
2	1160	26.61	33.04	0.91	15.83
3	1160	51.53	28.75	0.91	26.67
4	1160	75.84	22.83	0.92	30.87
5	1160	103.06	11.65	0.93	21.20
1	1450	0.00	58.73	1.81	0.00
2	1450	33.26	51.62	1.77	15.83
3	1450	64.41	44.93	1.77	26.67
4	1450	94.81	35.68	1.79	30.87
5	1450	128.82	18.21	1.81	21.20
1	1730	0.00	83.60	3.07	0.00
2	1730	39.68	73.48	3.01	15.83
3	1730	76.85	63.95	3.01	26.67
4	1730	113.11	50.79	3.04	30.87
5	1730	153.70	25.92	3.07	21.20

MODEL : OF500-17°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	25.21	0.50	0.00
2	950	18.07	23.39	0.47	14.56
3	950	36.14	21.07	0.47	26.25
4	950	53.10	15.72	0.47	28.77
5	950	71.03	6.11	0.46	15.28
1	1160	0.00	37.59	0.91	0.00
2	1160	22.06	34.87	0.86	14.56
3	1160	44.13	31.42	0.86	26.25
4	1160	64.84	23.44	0.86	28.77
5	1160	86.73	9.11	0.85	15.28
1	1450	0.00	58.73	1.77	0.00
2	1450	27.58	54.48	1.69	14.56
3	1450	55.16	49.10	1.69	26.25
4	1450	81.05	36.63	1.69	28.77
5	1450	108.42	14.24	1.65	15.28
1	1730	0.00	83.60	3.01	0.00
2	1730	32.91	77.56	2.86	14.56
3	1730	65.81	69.89	2.86	26.25
4	1730	96.70	52.14	2.86	28.77
5	1730	129.35	20.27	2.80	15.28

※ 상기데이터는 KS B 6311의 익거 시험한 데이터입니다





MODEL : OF500-37°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	28.36	0.58	0.00
2	950	28.82	26.65	0.56	22.32
3	950	57.14	24.01	0.58	38.54
4	950	85.27	18.56	0.58	44.84
5	950	114.28	10.34	0.57	33.75
1	1160	0.00	42.28	1.05	0.00
2	1160	35.20	39.73	1.02	22.32
3	1160	69.77	35.80	1.06	38.54
4	1160	104.12	27.67	1.05	44.84
5	1160	139.54	15.41	1.04	33.75
1	1450	0.00	66.07	2.05	0.00
2	1450	43.99	62.07	2.00	22.32
3	1450	87.21	55.94	2.07	38.54
4	1450	130.15	43.24	2.05	44.84
5	1450	174.42	24.08	2.03	33.75
1	1730	0.00	94.05	3.48	0.00
2	1730	52.49	88.36	3.39	22.32
3	1730	104.05	79.63	3.51	38.54
4	1730	155.29	61.55	3.48	44.84
5	1730	208.10	34.28	3.45	33.75

MODEL : OF500-27°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	26.72	0.53	0.00
2	950	22.95	23.10	0.50	17.20
3	950	45.26	20.32	0.50	29.84
4	950	68.42	17.77	0.48	41.00
5	950	90.51	7.95	0.48	24.51
1	1160	0.00	39.83	0.96	0.00
2	1160	28.02	34.44	0.92	17.20
3	1160	55.26	30.29	0.92	29.84
4	1160	83.54	26.49	0.88	41.00
5	1160	110.52	11.86	0.87	24.51
1	1450	0.00	62.24	1.87	0.00
2	1450	35.03	53.81	1.79	17.20
3	1450	69.08	47.33	1.79	29.84
4	1450	104.43	41.39	1.72	41.00
5	1450	138.15	18.53	1.71	24.51
1	1730	0.00	88.59	3.18	0.00
2	1730	41.79	76.60	3.04	17.20
3	1730	82.42	67.37	3.04	29.84
4	1730	124.59	58.92	2.93	41.00
5	1730	164.82	26.37	2.90	24.51

MODEL : OF500-22°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	25.21	0.51	0.00
2	950	21.79	22.16	0.50	15.83
3	950	42.20	19.28	0.50	26.67
4	950	62.11	15.31	0.50	30.87
5	950	84.40	7.81	0.51	21.20
1	1160	0.00	37.59	0.93	0.00
2	1160	26.61	33.04	0.91	15.83
3	1160	51.53	28.75	0.91	26.67
4	1160	75.84	22.83	0.92	30.87
5	1160	103.06	11.65	0.93	21.20
1	1450	0.00	58.73	1.81	0.00
2	1450	33.26	51.62	1.77	15.83
3	1450	64.41	44.93	1.77	26.67
4	1450	94.81	35.68	1.79	30.87
5	1450	128.82	18.21	1.81	21.20
1	1730	0.00	83.60	3.07	0.00
2	1730	39.68	73.48	3.01	15.83
3	1730	76.85	63.95	3.01	26.67
4	1730	113.11	50.79	3.04	30.87
5	1730	153.70	25.92	3.07	21.20

MODEL : OF500-17°

RPM : 1774

Num	rpm(N)	Q(m³/M)	Pt(mmAq)	H(kW)	etat(%)
1	950	0.00	25.21	0.50	0.00
2	950	18.07	23.39	0.47	14.56
3	950	36.14	21.07	0.47	26.25
4	950	53.10	15.72	0.47	28.77
5	950	71.03	6.11	0.46	15.28
1	1160	0.00	37.59	0.91	0.00
2	1160	22.06	34.87	0.86	14.56
3	1160	44.13	31.42	0.86	26.25
4	1160	64.84	23.44	0.86	28.77
5	1160	86.73	9.11	0.85	15.28
1	1450	0.00	58.73	1.77	0.00
2	1450	27.58	54.48	1.69	14.56
3	1450	55.16	49.10	1.69	26.25
4	1450	81.05	36.63	1.69	28.77
5	1450	108.42	14.24	1.65	15.28
1	1730	0.00	83.60	3.01	0.00
2	1730	32.91	77.56	2.86	14.56
3	1730	65.81	69.89	2.86	26.25
4	1730	96.70	52.14	2.86	28.77
5	1730	129.35	20.27	2.80	15.28

※ 상기데이터는 KS B 6311의 의거 시험한 데이터입니다

